



FIXING INSTRUCTIONS


Tileline Tile Vent

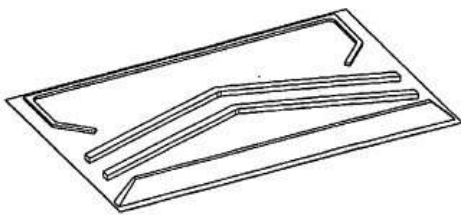


Underlay Protector

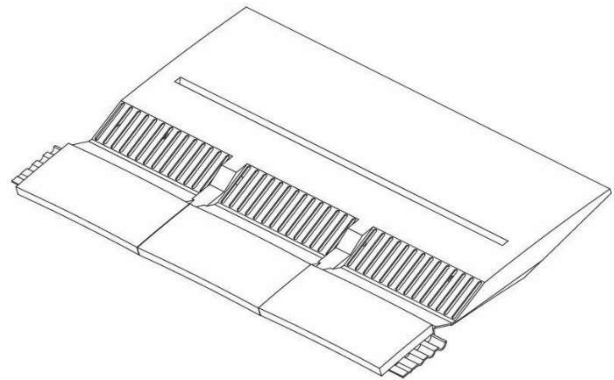


1. Felt, batten and tile the roof in the normal manner.
2. At the position the ventilator is required, locate the throat between two tile battens, remove and cut through the underlay as shown.

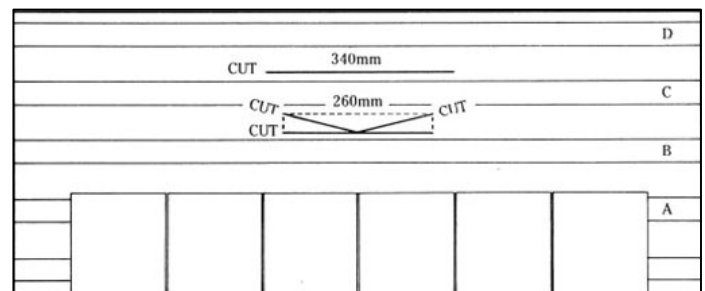

3. Fold the three flaps upwards and outwards to provide the hole for the ventilator throat.
4. Make a second horizontal cut 340mm wide in the underlay between the next two battens and directly above the opening already created. Slide in the underlay protector unit through the horizontal cut as shown.

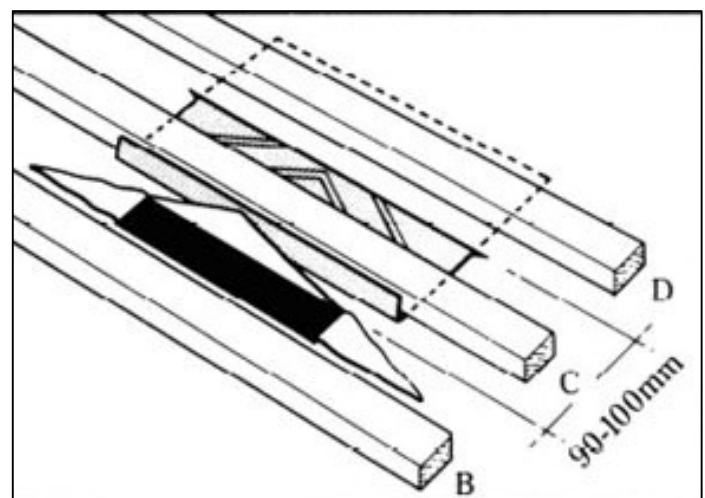

5. Insert the ventilator throat through the underlay into the roof space and position ventilator onto surrounding tiles. Fix to tile batten by side flanges with two nails ensuring half bond is maintained. Positive fixing is required to prevent the ventilator lifting when fitting pipe adapter.

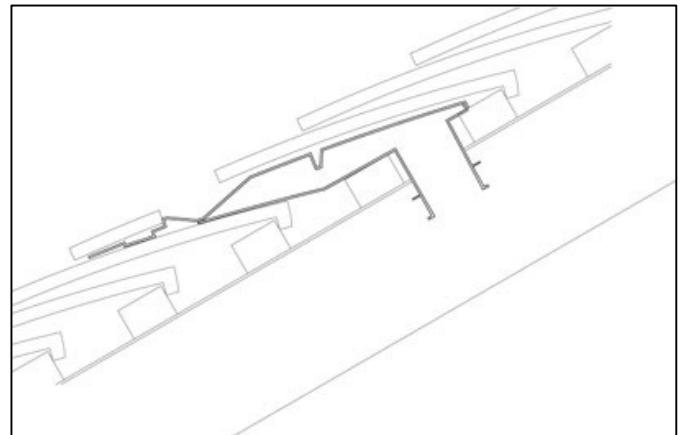

6. Continue tiling in the normal manner.

7. For soil ventilation or mechanical extraction, attach the Dreadnought Tileline adapter and flexible pipe (supplied separately) after installation of the ventilator.

Note. Do not use the plain tile ventilator for the exhaust of hot combustible gases. For soil vent pipe extraction, the ventilator must be sited at least 900mm from any opening windows.

