


FIXING INSTRUCTIONS

Tileline Tile Vent



A discreet ventilator that sits flush with the roof tiles and blends into the rest of the tiles.

1. Felt, batten and tile the roof in the normal manner.
2. At the position the ventilator is required, locate the ventilator throat between two tile battens, remove and cut through the underlay as shown to accommodate the ventilator throat.

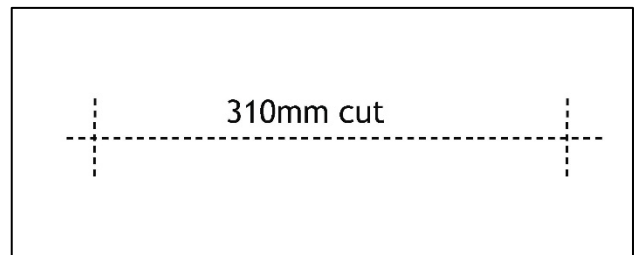

3. Fold the four underlay flaps upwards and outwards to provide the hole for the ventilator throat and slide in the ventilator.
5. Fix to tile batten with two nails and continue tiling in the normal manner.

NB. Can be used as a terminal for both soil vent pipes and mechanical extract in kitchens and bathrooms with the use of a pipe adapter and flexi pipe



Do not use the plain tile ventilator for the exhaust of hot combustible gases.